


A Smarter Way for Your Broadband Life

Huawei HG8240S, an intelligent bridging-type ONT

Smart service, interconnection, and O&M

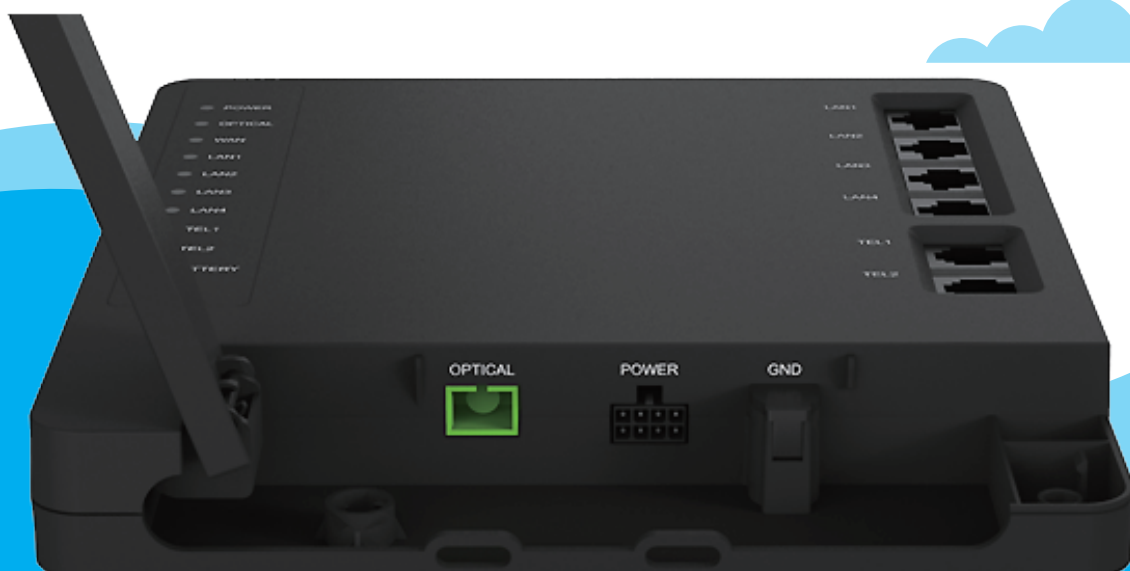

● Device Parameters

Dimensions (H x W x D)	(210 x 200 x 35) mm	System power supply	10–20 V DC, 2 A
Weight	< 1 Kg	Static power consumption	4 W
Operating temperature	-40 °C to +46 °C	Maximum power consumption	10 W
Operating humidity	5% RH to 95% RH	Ports	4GE + 2POTS
Power adapter input	100–240 V AC, 50–60 Hz	Indicators	POWER/PON/LOS/LAN/TEL

● Interface Parameters

GPON Port	Ethernet Port	POTS Port
• Class B+ • Receiver sensitivity: -27dBm • Wavelengths: US 1310nm, DS 1490nm • Wavelength blocking filter (WBF) • Flexible mapping between GEM Port and TCONT • GPON: consistent with the SN or password authentication defined in G.984.3 • Bi-directional FEC • SR-DBA and NSR-DBA	• Ethernet port-based VLAN tags and tag removal • 1:1 VLAN, N:1 VLAN, or VLAN transparent transmission • QinQ VLAN • Limit on the number of learned MAC addresses • MAC address learning • Local switching/isolation based on Ethernet ports • Transparent transmission of IPv6 packets at Layer 2	• Maximum REN: 4 • G.711A/μ, G.729a/b, and G.722 encoding/decoding • T.30/T.38/G.711 fax mode • DTMF • Emergency calls (with the SIP protocol)

● Product Function

Smart Service	• Association of one account with two POTS ports • L2 forwarding: 1G uplink, 2G downlink	Smart O&M	• Variable-length OMCI messages • Active/Passive rogue ONT detection and isolation • PPPoE/DHCP simulation testing • Call emulation, and circuit test and loop-line test
Smart interconnection	• SIP/H.248 auto-negotiation	Multicast	• IGMP v2/v3 snooping • MLD v1/v2 snooping • Fast leave • VLAN tag translation, transparent transmission, and removal for downstream multicast packets • IGMP/MLD protocol packet rate limitation
QoS	• Ethernet port rate limitation • 802.1p priority • SP/WRR/SP+WRR • Broadcast packet rate limitation • Flow mapping based on the VLAN ID, port ID, or/and 802.1p		
Security	• MAC address filtering		
Power Saving	• Indicator power saving • Power consumption reduction of idle components in power-saving state • COCV4	Common O&M	• OMCI/Web UI • Dual-system software backup and rollback • 802.1ag Ethernet OAM • Optical link measurement and diagnosis • Loopback check